

OPTICAL FIBRE ASSEMBLIES

Pigtails Singlemode & Multimode




Features & Specifications

- ▶ Available in SC, ST, FC, LC, E2000 & MU connector styles
- ▶ Used in 10 Gigabit, ethernet, fast ethernet and FDDI networks
- ▶ 850nm VCSEL based GbE (1000 base-SX) to support longer distance
- ▶ Standard product manufactured on 2.8mm (nominal dia.) LSZH zip cable Also available in 2mm (nominal dia) cable
- ▶ Individual test sheet and unique product identification number for traceability
- ▶ Low insertion loss (<0.3dB)
- ▶ RoHS Compliant
- ▶ Meets international reliability standards

Technical Specifications

TEST	METHOD	SPECIFICATION
Connector Type Standards	IEC61574 series	-
Insertion Loss	IEC 61300-3-4	<0.30dB
Flammability	IEC60332-1	-

Part Number

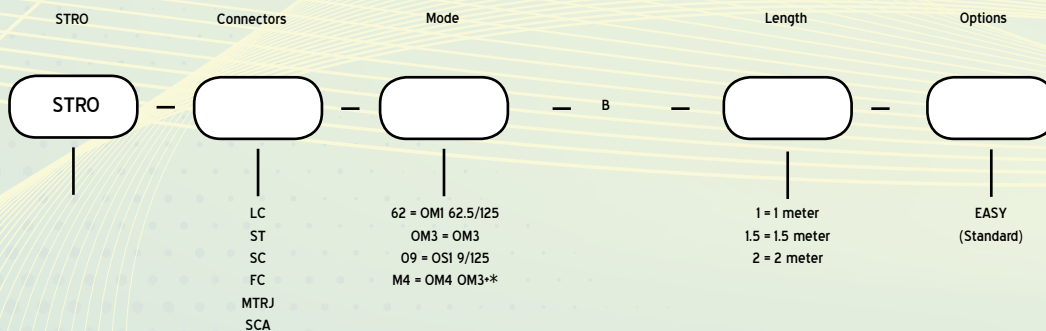

*Note: these are new products, please call sales for more details

